

CROWER
CROWER
CROWER


CROWER



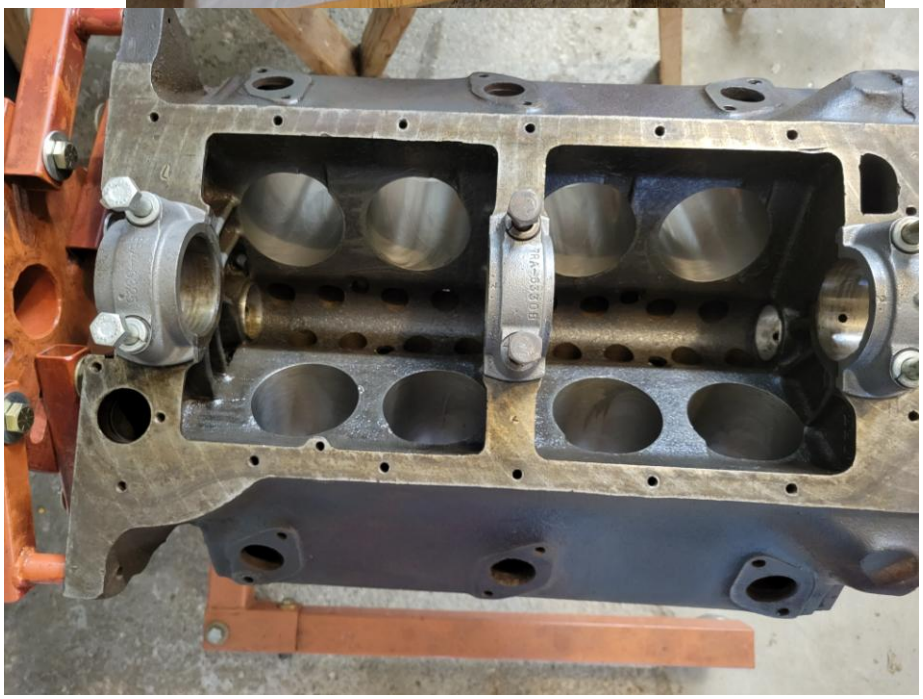

CROWER Part Number: F12750

Engine Application: FORD FLAT HEAD V8
Grind Number: FLAT TAPPET 1953

ADVERTISED CAMSHAFT SPECIFICATIONS:


INTAKE:	Duration: 270°	Lift: .352	Clearance Hot: .010
EXHAUST:	Duration: 270°	Lift: .352	Clearance Hot: .012

The specifications listed above are based on a rocker arm ratio of 1.00 IN / 1.00 EX

RECOMMENDED VALVE SPRING INFORMATION:

Part Number:

Approximate spring pressure: valve closed: LBS. / valve open: LBS.



Timing Events

The information below is for degreeing cam only. Correct only at .050" tappet lift.


INTAKE	Opens: 8.0 BTDC Closes: 40.0 ABDC
EXHAUST	Opens: 48.0 BBDC Closes: 0.0 ATDC
LOBE SEPARATION 110°	
Duration at .050"	Intake: 228 Exhaust: 228
LOBE LIFT	Intake: .352 Exhaust: .352

4 degrees of advance have been ground into this Camshaft.

If using "Lobe Center" method of degreeing, cam should be installed on an intake centerline of: 106

NOTES:
106 INT.LC.114 EXH.LC

Cams damaged by excessive spring pressure, over shimming, valve train bind or retainers contacting the guides are void from warranty. Refer to the "Important Camshaft and Lift Information" booklet included with each new Crower camshaft to avoid any break-in problems.

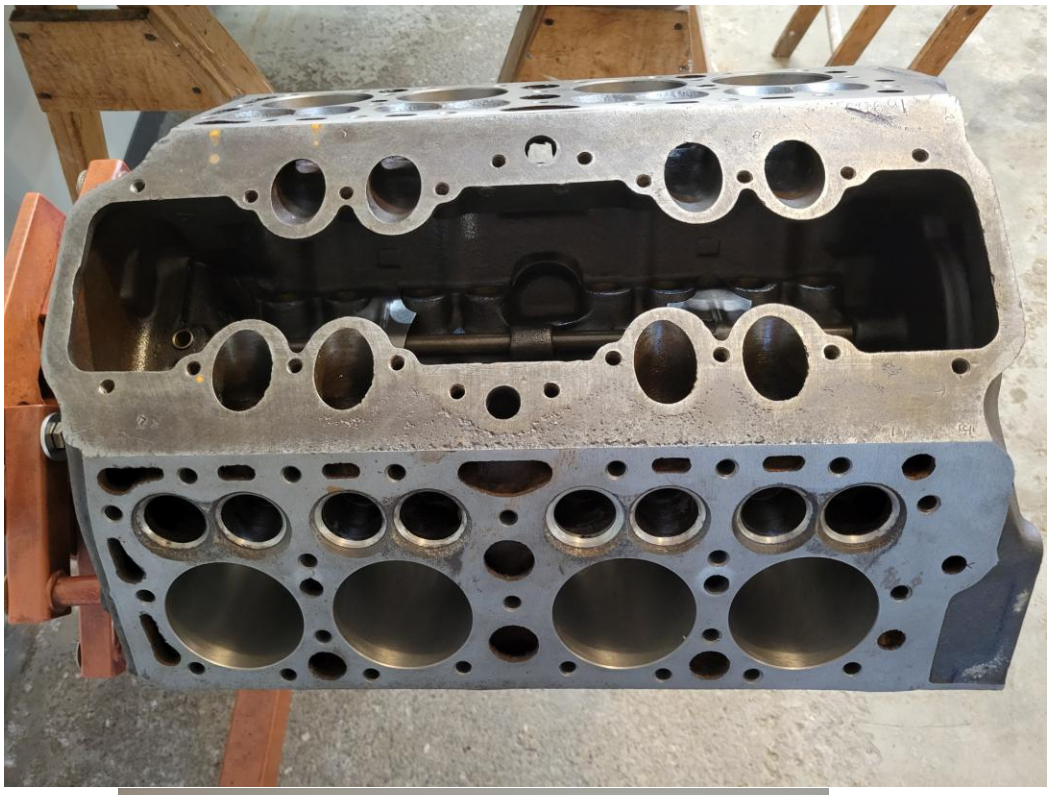


CROWER
CLEVITE 77
CLEVITE 77