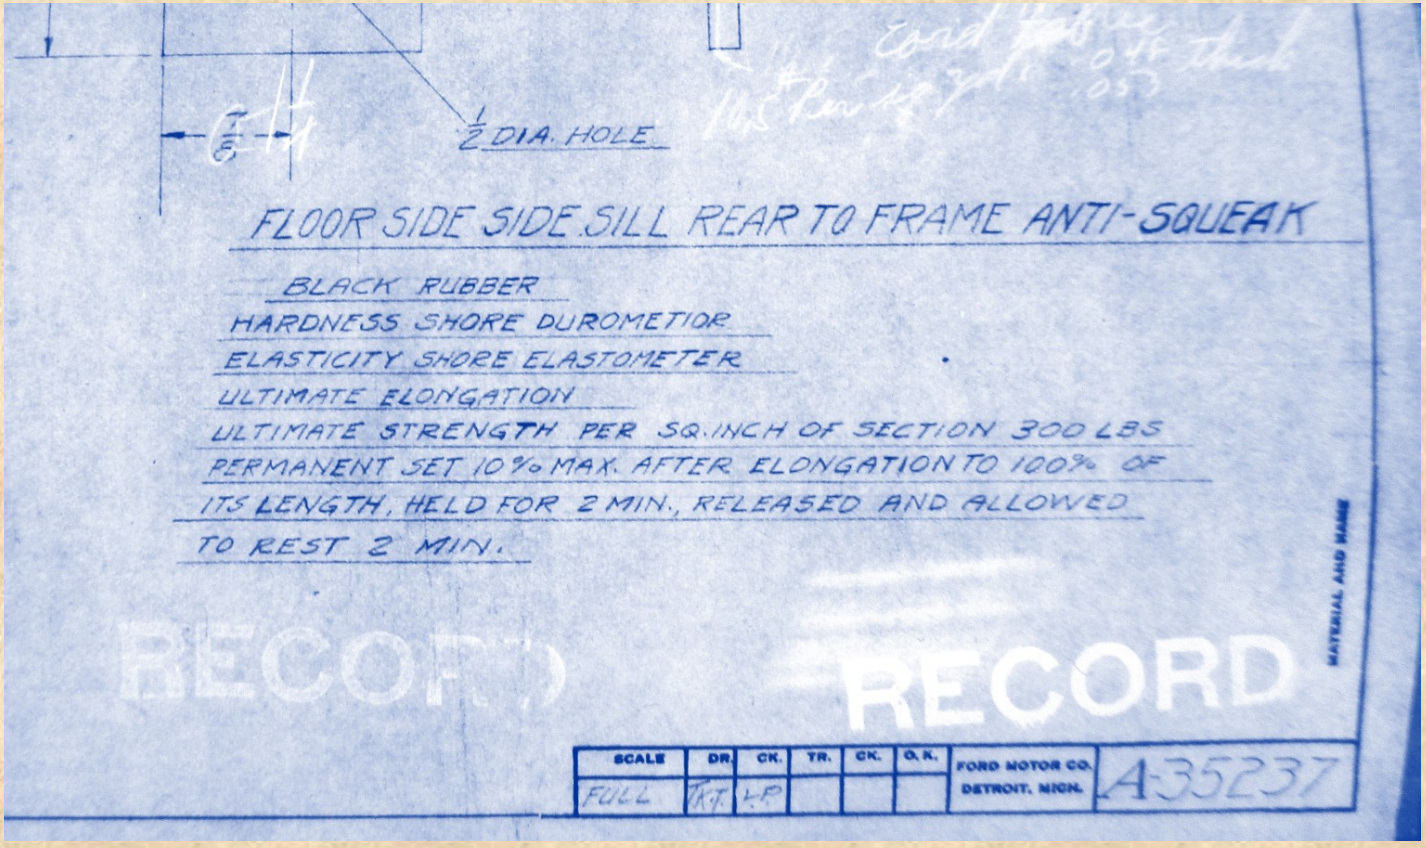

1/2 DIA. HOLE
FLOOR SIDE SIDE SILL REAR TO FRAME ANTI-SQUEAK
BLACK RUBBER
HARDNESS SHORE DUROMETIOR
ELASTICITY SHORE ELASTOMETER
ULTIMATE ELONGATION
ULTIMATE STRENGTH PER SQ. INCH OF SECTION 300 LBS
PERMANENT SET 10% MAX. AFTER ELONGATION TO 100% OF
ITS LENGTH, HELD FOR 2 MIN., RELEASED AND ALLOWED
TO REST 2 MIN.
RECORD
RECORD
MATERIAL AND NAME
SCALE
DR.
CK.
TR.
CK.
O. K.
FULL
T.K.T.
L.P.
FORD MOTOR CO.
DETROIT, MICH.
A-35237