
ELECTROLOCK IGNITION
MID 1930 & 1931
FOR MODEL "A" FORDS WITH THE RIBBED DESIGN INSTRUMENT PANEL

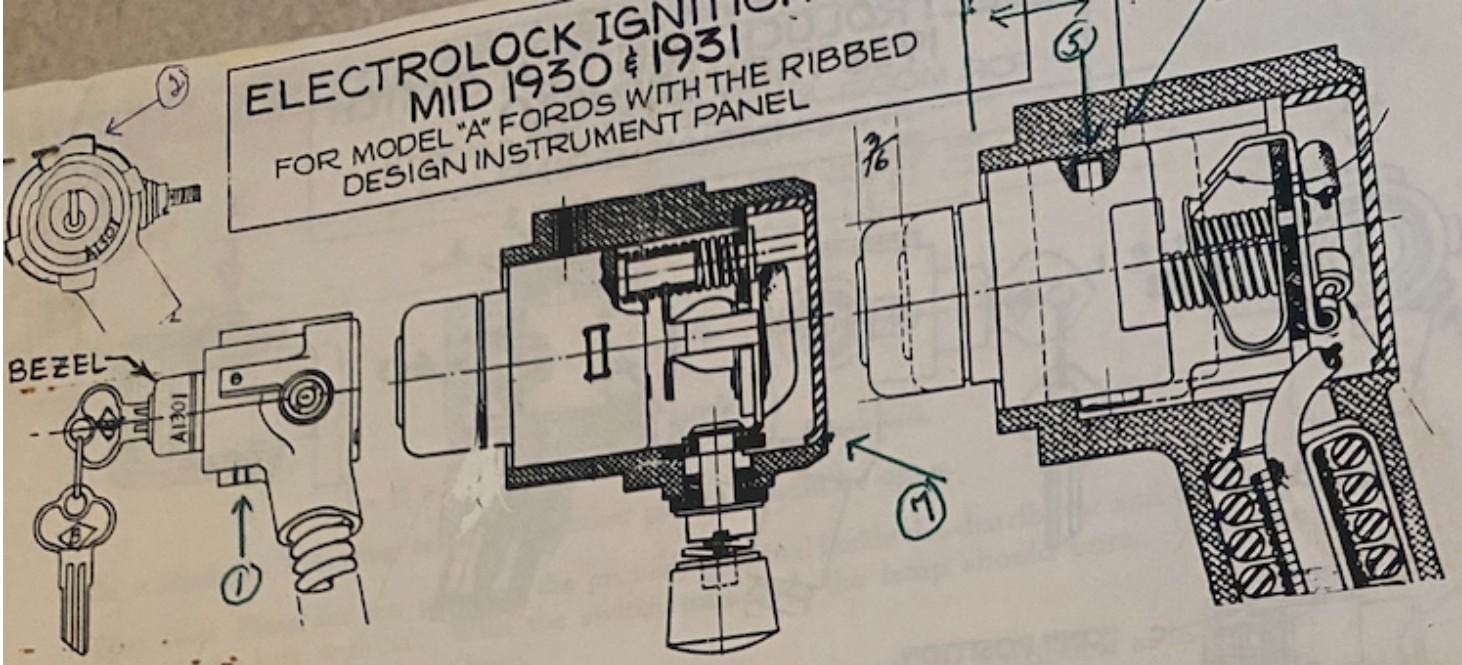


A. Insert key and turn as far as it will go in the unlock position while pressing in with a small nail in poke hole (1) and remove cylinder and spring from the front. One type has a screw (remove) instead of the poke hole.

B. To remove cylinder when in the locked position (with no key) drill small hole at area (2), 5/8th inch from face of body (3) with small nail push plungerin (4) and the cylinder will nove out to the unlocked position (5); then remove cylinder as described in "A".


C. The back cover must be removed to replace cable and to remove fiber plate with contact point for cleaning. The back cover can be removed by using a very small punch inserted into several small openings past the fiber plate to inside of the cover, OR by grinding 3 or 4 of the crimped over areas around the cover edge (7).

D. After back cover is removed, uncrimp and unsodder wire and remove armored cable by twisting out.

E. To remove bezel and face plate forbright nickle plating: place cylinder in vice with protection (rubber) around it and carefully tighten vice to hold it in place. (The metal is soft and could break if tightened too much). -Using two sharpenedends of screw drivers, pry bezel up(as shown in the diagram) and remove with face plate. Some face plates come out the bottom with the tumbler body.

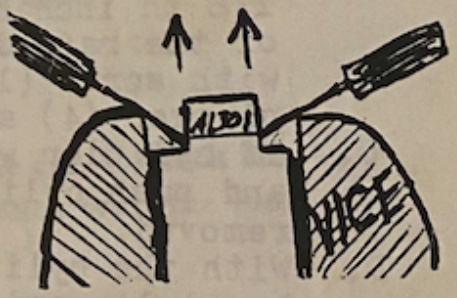

F. The tumbler body is removed from the back end by removing spring A, plunger B, and slide lock C. The slide lock must be in an unlocked position, turn with key. After slide lock is removed use an old key with the head cut off inserted in lock to keep tumblers in place while removing. If you have no key use a probe inserted past where spring and plunger were removed and press tumblers flush while turning cylinder to unlock and remove slide lock, then the tumbler body. *Note diagram.

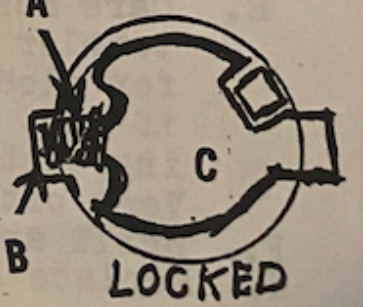

G. A different key can be used by-- recutting a key to fit; interchanging tumblers to fit the key; or even file tumblers flush to the body. Replace the parts in order as removed.

Cal Allan